


JS14-A Series Time Relay



1 Product overview

JS14-A series time relay is used in AC 50Hz control circuit with rated control power voltage of 380V and below or with A DC 24V voltage as delay element for turn on or turn off circuits as scheduled.

2 Type designation

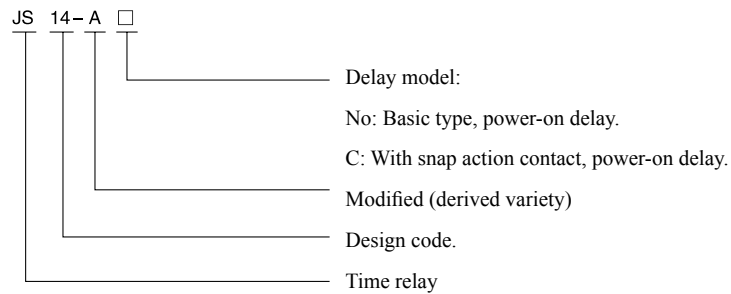


3 Product parameters

Model	JS14-A	JS14-AC
Working method	Power-on delay	Power-on delay with snap action contact
Power voltage	AC50Hz 36V、110V、127V、220V、380V、DC24V (other voltage can be customized)	
Repeated error	$\leq 2.5\%$	
Number of contacts	Delay 2 conversion	Instantaneous action 1 conversion delay 1 conversion
Contact capacity	5A 220VAC(resistive) U_e/I_e : AC-15 220V/0.5A; DC-13 24V/0.5A; I_{th} : 5A	
Electrical life	1×10^7 times	
Mechanical life	1×10^6 times	
Ambient emperature	$-5^{\circ}\text{C} \sim +40^{\circ}\text{C}$	
Installation method	Device type, rail type	
Delay accuracy	$\leq 10\%$	
Delay range	0.1s-1s、0.5s-5s、1s-10s、3s-30s、6s-60s、12s-120s 18s-180s、30s-300s、60s-600s、90s-900s 120s-1200s、180s-1800s、360s-3600s	

JS14-A Series Time Relay

4 Wiring diagram

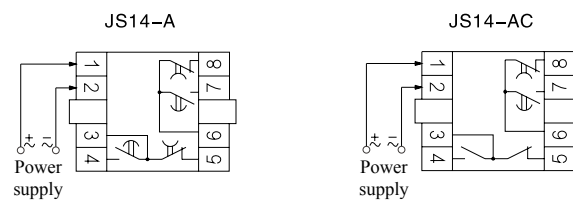

5 Outline and installation dimension

