


TGBGLB-63 Residual Current Circuit Breaker with Overcurrent Protection

1 Product overview

TGBGLB-63 series residual current circuit breaker with overcurrent protection (hereinafter referred to as leakage circuit breaker) is mainly used in AC 50Hz line with rated working voltage 230V/400V and rated current up to 63A. In case of personal electric shock or when the grid leakage exceeds the specified value, the residual current circuit breaker can quickly cut off the power supply in a very short time for protection of the safety of people and electrical equipment, for overload, short circuit, and overvoltage protection and infrequent conversion of the line under normal conditions, especially suitable for industrial and commercial lighting distribution systems.

2 Type designation

TG B G LB - 63

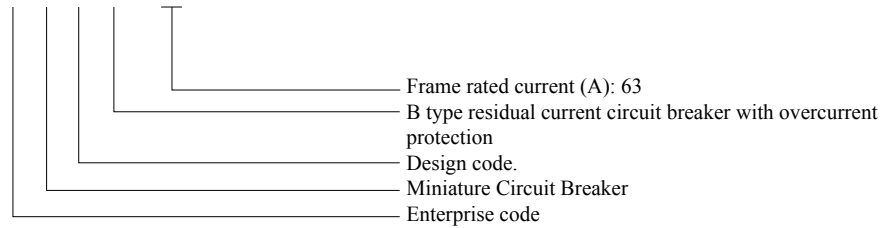

3 Product parameters

3.1 The main technical parameters of the product (see Table 1)

Table 1

Product name		TGB1NLE-63
Standards		IEC61009-1
Product certification		CE
Electrical characteristics		
Number of poles		2P, 4P
Rated frequency (Hz)		50
Frame rating current (A)	Inm	63
Rated current (A)	Ie	6、10、16、20、25、32、40、50、63
Rated voltage (V)	Ue	AC230 (2P) AC400 (4P)
Rated insulation voltage (V)	Ui	690
Rated impulse withstand voltage (kV)	Uimp	4
Rated short-circuit breaking capacity (kA)	Ics	6
Rated short-circuit breaking capacity (kA)	Icn	6
Instantaneous trip characteristics		C(5In ~ 10In) D(10In ~ 14In)
Trip form		Thermal magnetic trip
Pollution level		2
Electrical and mechanical accessories		MX: Shunt release OF: Auxiliary contact SD: Alarm contact MX+OF: Shunt release+ auxiliary contact MV: Overvoltage release MN: Undervoltage release MV+MN: Overvoltage and undervoltage release
Rated residual current (mA) $I_{\Delta n}$		30、50、75、100、300
Maximum breaking time at rated residual current		0.1s

TGBGLB-63 Residual Current Circuit Breaker with Overcurrent Protection

Table 1, Continued

Product name	TGB1NLE-63
Overvoltage protection: $U_{vo}=280V\pm5\%$	√
Mechanical properties	
Electrical life	10000
Mechanical life	20000
Protection grade	IP20
Normal operation conditions and installation characteristics	
Ambient temperature	$-35^{\circ}\text{C}\sim +70^{\circ}\text{C}$
Installation site altitude	$\leq 2000\text{m}$
Terminals	Fixed with screw
Maximum wiring capacity (mm^2)	16
Maximum limit torque (Nm)	2
Installation category	Class II, III
Installation method	35mm standard rail
Incoming method	Upper and lower


3.2 Action characteristics of circuit breaker overcurrent release (see Table 2)

Table 2


No.	Test current (A)	Start state	Set time	Expected outcome	Remarks
a	$1.13I_n$	Cold state	$t \leq 1\text{h}$	No trip	The current rises to the specified value within 5s
	$1.45I_n$	Followed by $1.13I_n$ test	$t < 1\text{h}$	trip	
	$2.55I_n$	Cold state	$1\text{s} < t < 60\text{s}$ (For $I_n \leq 32\text{A}$) $1\text{s} < t < 120\text{s}$ (For $I_n \leq 32\text{A}$)	trip	
c	$5I_n$	Cold state	$t \leq 0.1\text{s}$	No trip	Turn on the auxiliary switch for making current
	$10I_n$	Cold state	$t < 0.1\text{s}$	trip	
d	$10I_n$	Cold state	$t \leq 0.1\text{s}$	No trip	Turn on the auxiliary switch for making current
	$14I_n$	Cold state	$t < 0.1\text{s}$	trip	

Note: The cold state refers to the temperature 30°C without load before the test.

3.3 Protection characteristic curve of circuit breaker

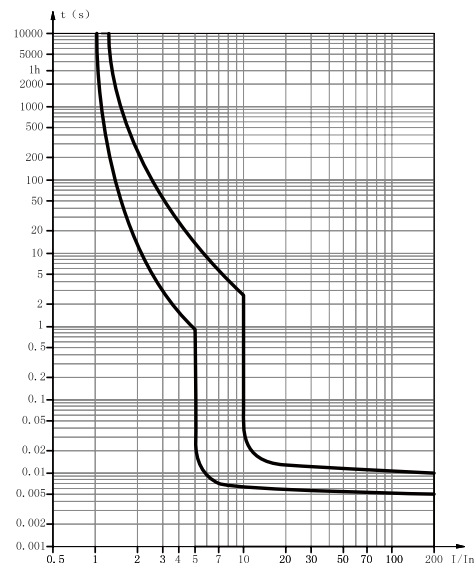

C Type protection characteristic curve

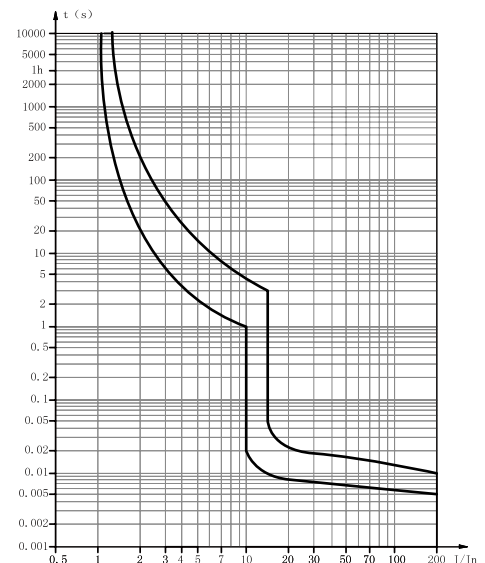

D Type protection characteristic curve


TGBGLB-63 Residual Current Circuit Breaker with Overcurrent Protection

3.4 Wiring: Suitable for wire connection of 25mm² and below (see Table 3). The wiring method is that the wire is fixed with screws according to the tightening torque 2.5N·m.

Table 3

Rated current (A)	Cross area of wire (mm ²)
6	1
10	1.5
16 ~ 20	2.5
25	4
32	6
40 ~ 50	10
63	16

4 Outline and installation dimensions

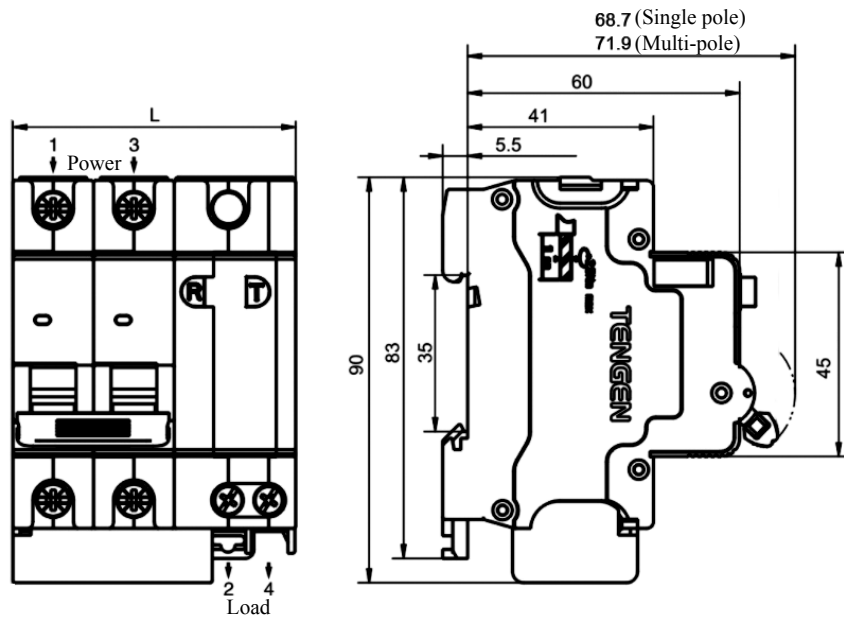

TGBGLB-63 Residual Current Circuit Breaker with Overcurrent Protection

Table 4

Model	Number of poles	L(mm)
TGBGLB-63	2P	72
TGBGLB-63	4P	135

5 Order Information

- 5.1 Product model and name, such as: TGBGLB-63 residual current operated circuit breaker
- 5.2 Trip type, such as: C type
- 5.3 Number of poles of product, such as 2P
- 5.4 Rated current, such as 10A
- 5.5 Rated residual operating current, such as: 30mA
- 5.6 Order quantity, such as: 50 units
- 5.7 Order example: TGBGLB-63 2P C10 30mA, 50 units